

EM-COVER

Monitored

TROJAN
DEVELOPMENTS

This is for use with Em Rex or Smart Em Rex

Technical

The Em Cover is for use with the Em Rex® or Smart Em Rex® unit to deter unintended or malicious activation of the unit when it is installed in a public area. The monitored version has two outputs which can be used to monitor the operation of the cover.

Installation Wiring Diagram


Power supply connection +10 to 28Vdc as per the Em Rex / Smart Em Rex Units.

The Yellow and White wires are a Normally closed contacts for connection to the Access Control System for monitoring. This is an Opto-isolated output which is rated at 200mA @ 30Vdc

Wiring diagram showing the connections to the Em Rex / Smart Em Rex.

The cover is made from polycarbonate so it is very strong and resistant to mis-use or vandalism.

The cover is held closed by two little nodules on either side of the lift up cover which lock in and inhibit the lifting of the cover. These can be filed down to make it easier to open the unit if required

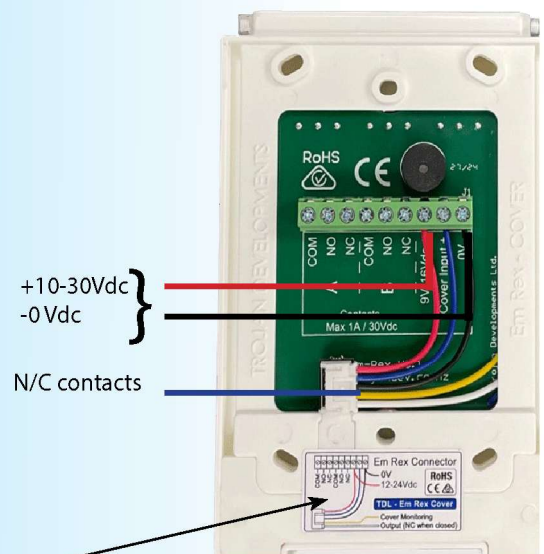

Product code:

▼ ECM

▼ www.trojandev.co.nz

▼ sales@trojandev.co.nz



developing innovative egress solutions since 1987