
# TDL-8FB



### **Eight Way Fuse Board**

The TDL-8FB is an 8 Way Fuse Board. It has 8 individual fused outputs. Each fuse has an associated LED to indicate that the fuse is operative. The LED illuminates green for normal positive 12Vdc operation and amber for AC voltages up to 24Vac.

#### **Installation Wiring Diagram**

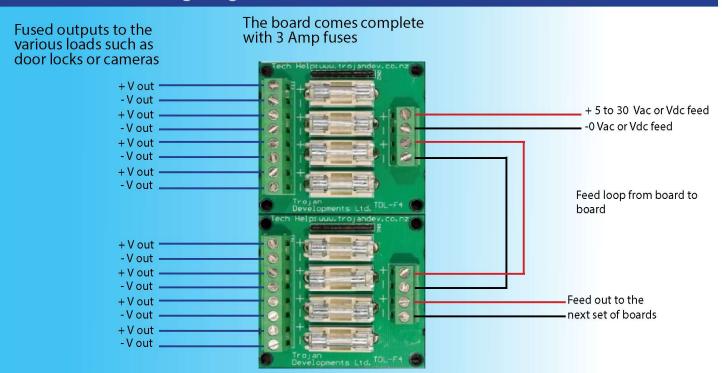

## **Specifications:**

- 8-Way Fuse Board
- ▼ Fuse size: 20mm x 5mm (included with the board)
- Terminals for positive and negative outputs the positive outputs are fused
- Suitable for AC and DC power supplies
- Maximum supply current per 4-way fuse board is 20 Amps
- Maximum output current is 5 Amps
- ▼ Dimensions: 110mm (w) x 60mm (h) x 23mm (d)
- Fits the TDL Mounting Base

#### **Product code:**

- ▼ TDL-8FB
  - **▼** www.trojandev.co.nz
- ▼ sales@trojandev.co.nz

